


AIRMATE

SUBMITTAL DRAWING



- FITS STANDARD 2' X 2' T-BAR CEILING SYSTEMS
- DIRECTIONAL DEFLECTOR
- BONDED FOIL VAPOR BARRIER HELPS MINIMIZE CONDENSATION PROBLEMS
- FIBERGLASS BACK R 6.0 ABSORBS SOUND
- PRESCORED BACK ACCEPTS 6 TO 14 INCH SPIN OR TAB COLLARS
- FINISH: WHITE (W)

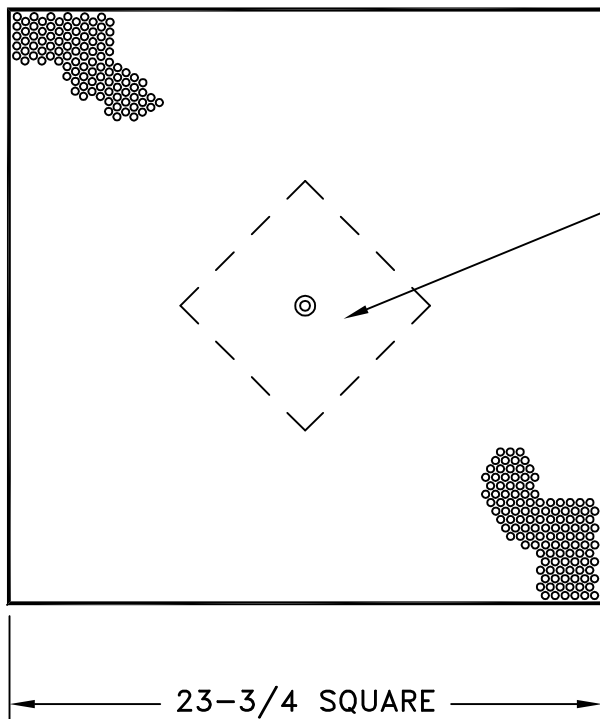

FIXED DEFLECTOR

SEISMIC SAFETY CONNECTIONS
(4 TOTAL:
2 ON 2 SIDES)

1 INCH FIBERGLASS BACK PANEL R 6.0

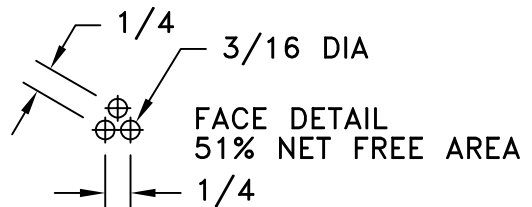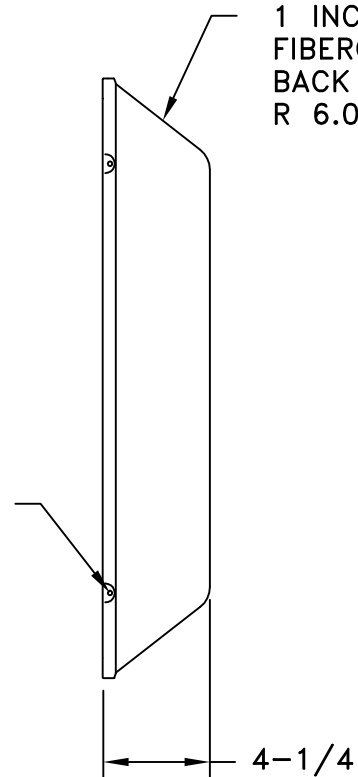

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 10/9/2012

770 ins R6
 Perforated T-Bar Diffusers
 Fiberglass Back